


# F7 Draw Latch

## Flexible · Pull type

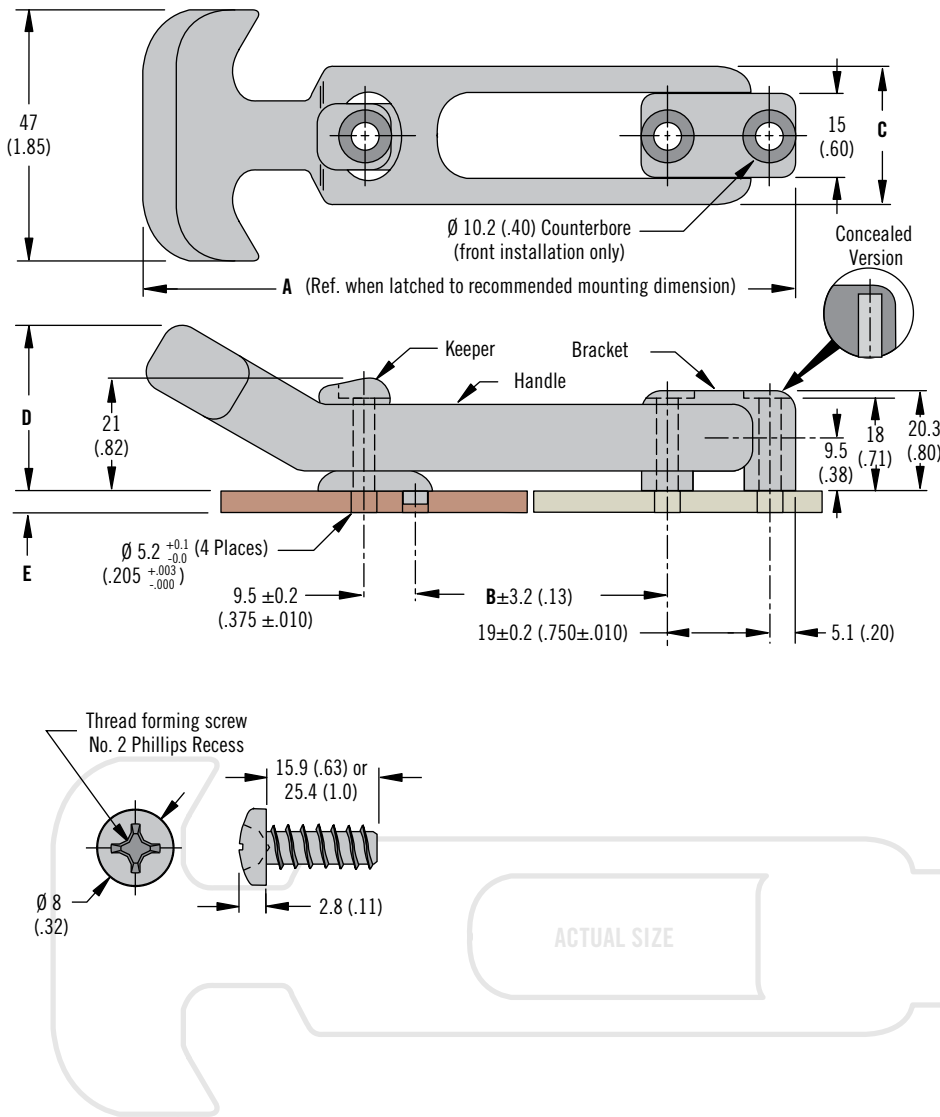

- Flexible one piece molded latch
- UV resistant
- Absorbs and reduces vibration

### Material and Finish

Thermoplastic elastomer and glass-filled nylon, black

Screw: Stainless steel, passivated

### Performance Details

Clamping force

Small: 58 N (13 lbf)

Medium: 84 N (19 lbf)

Large: 98 N (22 lbf)

Flammability rating: UL94-HB

### Installation Notes

Concealed:

Install assembly with thread forming screws (order separately).

Max. tightening torque

2.0 N·m (18 in·lbf)

Front installation:

Install assembly with M5

(No. 10) screw or Ø 5 (3/16) rivet (not supplied)

Part Number				Installation Method	Dimensions				
Size	Latch	Keeper	Screws (3 per bag)		E	A	B	C	D
Small	F7-530	F7-537	~	Front	~	112 (4.81)	41 (1.6)	25.4 (1.00)	31 (1.23)
	F7-540	F7-547	F7-548-3	Concealed (thread forming)	up to 8.0 (.32)				
			F7-558-3	Concealed (thread forming)	8.1 - 17.5 (.32 - .69)				
Medium	F7-630	F7-537	~	Front	~	167 (6.6)	72 (2.83)	32 (1.25)	29 (1.13)
	F7-640	F7-547	F7-548-3	Concealed (thread forming)	up to 8.0 (.32)				
			F7-558-3	Concealed (thread forming)	8.1 - 17.5 (.32 - .69)				
Large	F7-730	F7-537	~	Front	~	221 (8.7)	117 (4.6)	32 (1.25)	29 (1.13)
	F7-740	F7-547	F7-548-3	Concealed (thread forming)	up to 8.0 (.32)				
			F7-558-3	Concealed (thread forming)	8.1 - 17.5 (.32 - .69)				

### Part Number

See table

Order latch, keeper and screws (if required) separately