



01 Cam Latch

Small · Flush handle · Cup style · Adjustable grip

• Low profile design

Material and Finish

ABS, zinc and steel, zinc plated

Performance Details


Max. static load: 160 N (35 lbf)

Flammability rating: UL94-HB


Notes

For multi-point latching options see pages 244 - 245


For fixed grip version see pages 90 - 91

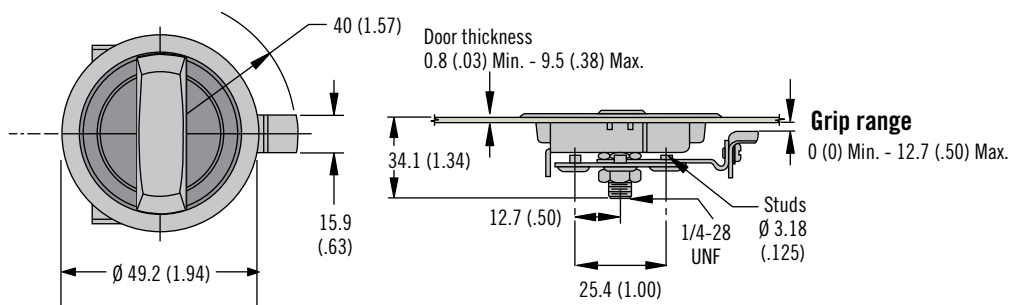


Type A (shown)

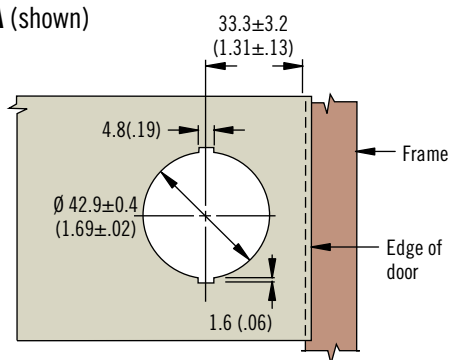

ACTUAL SIZE

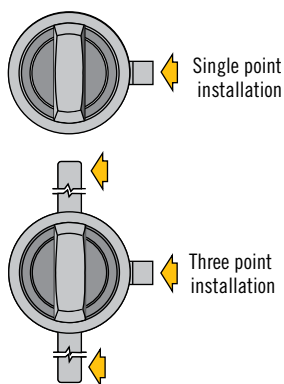


Type A Assemblies (Turn handle clockwise to latch)



Handle shown **parallel** to edge of door when latched

Type B Assemblies (Turn handle counter-clockwise to latch)



Handle shown **perpendicular** to edge of door when latched

- Mounted on either type A or B doors.

Choose horizontal or vertical closed position of handle

Part Number Selection



R Rotation

- 1 Type B counter-clockwise to latch for parallel installation
- 2 Type B counter-clockwise to latch for perpendicular installation
- 1 Type A clockwise to latch for perpendicular installation
- 2 Type A clockwise to latch for parallel installation



www.southco.com/01

Dimensions in millimeters (inch) unless otherwise stated



southco
CONNECT · CREATE · INNOVATE

01 Cam Latch



Medium · Flush and bail handle · Cup style · Adjustable grip



109

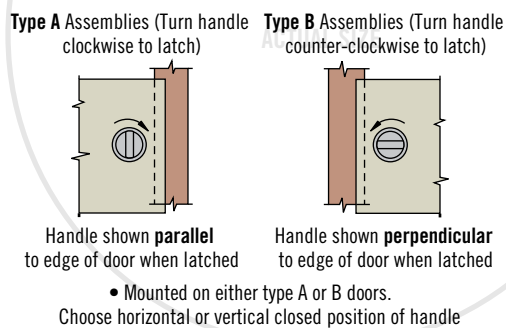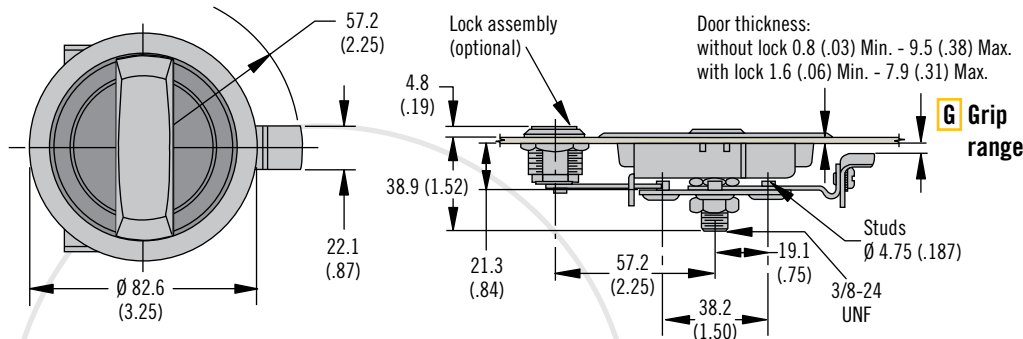

Type A (shown)

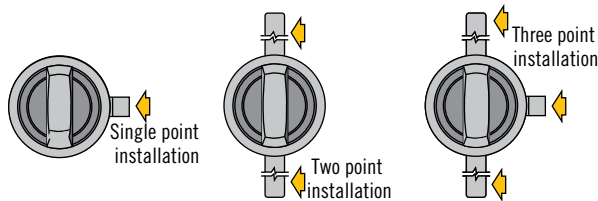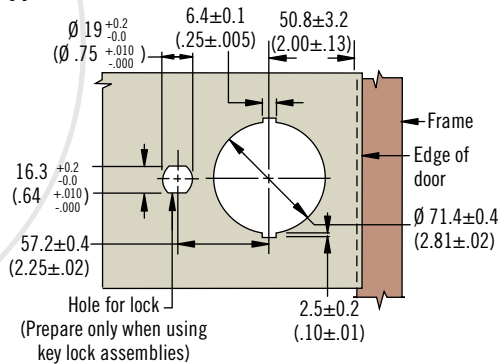

• Low profile design

Material and Finish

ABS, zinc and steel, zinc plated

Performance Details

Max. static load: 220 N (50 lbf)

Flammability rating UL94-HB

Keys


See page 98

Notes

For multi-point latching options see pages 244 - 245

For fixed grip version see pages 90 - 91

Part Number Selection

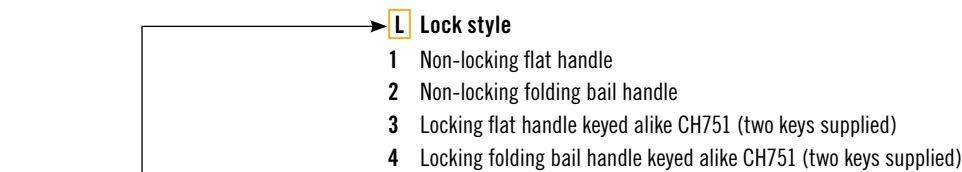

F Finish

- 1 Bright chrome
- 5 Black (flat handle only)

G Grip	Grip Range	Type A	Type B	Cam Type
1	0 - 12.7 (0 - .50)	Perpendicular	Parallel	Single or three point latching
2	0 - 12.7 (0 - .50)	Parallel	Perpendicular	Single or three point latching
3	12.7 - 28.6 (.50 - 1.13)	Perpendicular	Parallel	Single or three point latching
4	12.7 - 28.6 (.50 - 1.13)	Parallel	Perpendicular	Single or three point latching
5	Two point only	Perpendicular	Parallel	Two point only
6	Two point only	Parallel	Perpendicular	Two point only

01-10-401-10	01-43-45
01-10-401-65	01-43-51
01-10-402-10	01-43-55
01-10-402-65	01-43-61
01-10-701-51	01-43-65
01-10-702-51	01-81-1
01-10-721-51	01-81-5
01-10-722-51	
01-13-11	
01-13-15	
01-13-21	
01-13-25	
01-13-31	
01-13-35	
01-13-41	
01-13-45	
01-13-51	
01-13-55	
01-13-61	
01-13-65	
01-14-101-15	
01-14-102-15	
01-23-11	
01-23-15	
01-23-21	
01-23-25	
01-23-31	
01-23-35	
01-23-41	
01-23-45	
01-23-51	
01-23-55	
01-23-61	
01-23-65	
01-33-11	
01-33-15	
01-33-21	
01-33-25	
01-33-31	
01-33-35	
01-33-41	
01-33-45	
01-33-51	
01-33-55	
01-33-61	
01-33-65	
01-43-11	
01-43-15	
01-43-21	
01-43-25	
01-43-31	
01-43-35	
01-43-41	