

P8 Grab Handle Surface mount


- Two styles and color options available
- Concealed installation
- Four standard lengths

Material and Finish

Aluminum, anodized, clear or black

Performance Details

Max. working load: 1500 N (335 lbf)





Installation Notes

Screws not supplied. Calculate screw length using the following formula: Door thickness + 5 (.20) Max. tightening torque of mounting

screws: 1.7 N·m (15 in·lbf)

Part Number Selection



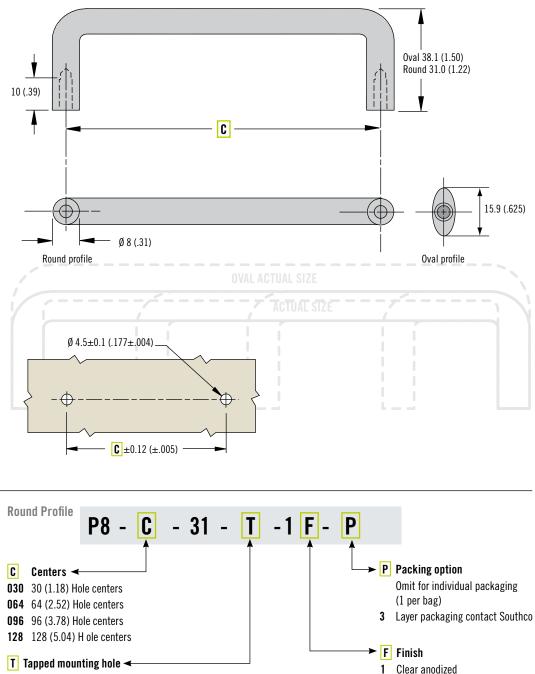

Part Number

INFO CLIC

Oval profile handles are currently offered in a 10-32 thread only.

Oval Profile

08 Imperial 8-32

M4 Metric M4 x 0.7

Finish	Part Number		R
	Bulk Packaged	Individually Packaged (1 per bag)	U.
Clear anodized	P8-128-38-10V-11-3	P8-128-38-10V-11	128 (5.04)
Black anodized	P8-128-38-10V-15-3	P8-128-38-10V-15	



5 Black anodized