



- ## Material and Finish

Housing cover, cup and handle:
Stainless steel, 316 grade electropolished
Housing:
PC/PBT blend, black or white

Performance Details

Max. working load: 270 N (60 lbf)

Operating temperature range:
-18°C (0°F) to 60°C (140°F)

Flammability rating: UL94-HB

Installation Notes

Max. tightening torque on mounting screws (supplied): 1.7 N·m (15 in·lbf)

Accessories

Keeper

Part number: M1-519-4

.....
Key 948 (pair)

Part number: MF-97-948-41



For other keying options please contact
Southco Marine

.....
Replacement mounting screw

Part number: MP-520-28-4

Technical drawing of the 100 Series lock assembly, showing front and side views with dimensions in millimeters (mm) and inches (in).

Front View Dimensions:


- Overall Width: 75 (3.0)
- Overall Height: 65 (2.55)

Side View Dimensions:


- Overall Height (including handle): 36 (1.4)
- Height to top of lock body: 0 (1.6)
- Height to bottom of lock body: 25.5 (1.0)
- Height to bottom of base plate: 23±3 (91±12)

Labels:

- Handle in open position

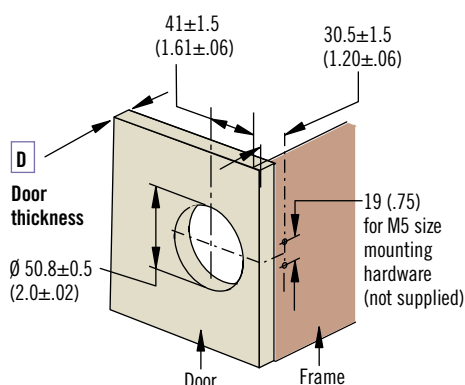

Installation



Part Number Selection


MP - 03 - 1 **L** **D** - **F** 0

L Lock style ←

0 Non-locking

1 Key-locking keyed alike 948 (2 keys supplied)

Grip Adjustment



F Finish

00 316 Stainless cover over black housing

55 Black housing

77 White housing

D Door thickness

0	10 - 16 (.39 - .63)
1	16 - 22 (.63 - .87)