

# P9 Grab Handle

## Folding · Surface mount




- Low profile folding style
- Concealed installation
- Anti-rattle friction feature

### Material and Finish

Handle and base:  
Aluminum, anodized, clear or black  
Roll pin, mounting nuts and lockwashers:  
Stainless steel passivated  
Bushing: Nylon

### Performance Details

Max. static load:  
Internal threaded version  
600 N (135 lbf)  
External thread version  
400 N (90 lbf)




### Installation Notes

Internal thread:  
Screws not supplied.  
Calculate screw length using the following formula:  
Door thickness + 5 (.20)  
Max. tightening torque of mounting screws: 1.7 N·m (15 in·lbf)  
External thread:  
Max. door thickness 8.4 (.33)  
Mounting nuts supplied.  
Max. tightening torque of nuts: 11.5 N·m (10 in·lbf)

### Part Number Selection

For visual identification:  
M4 products have a counterbored hole.  
8-32 products have a countersink hole

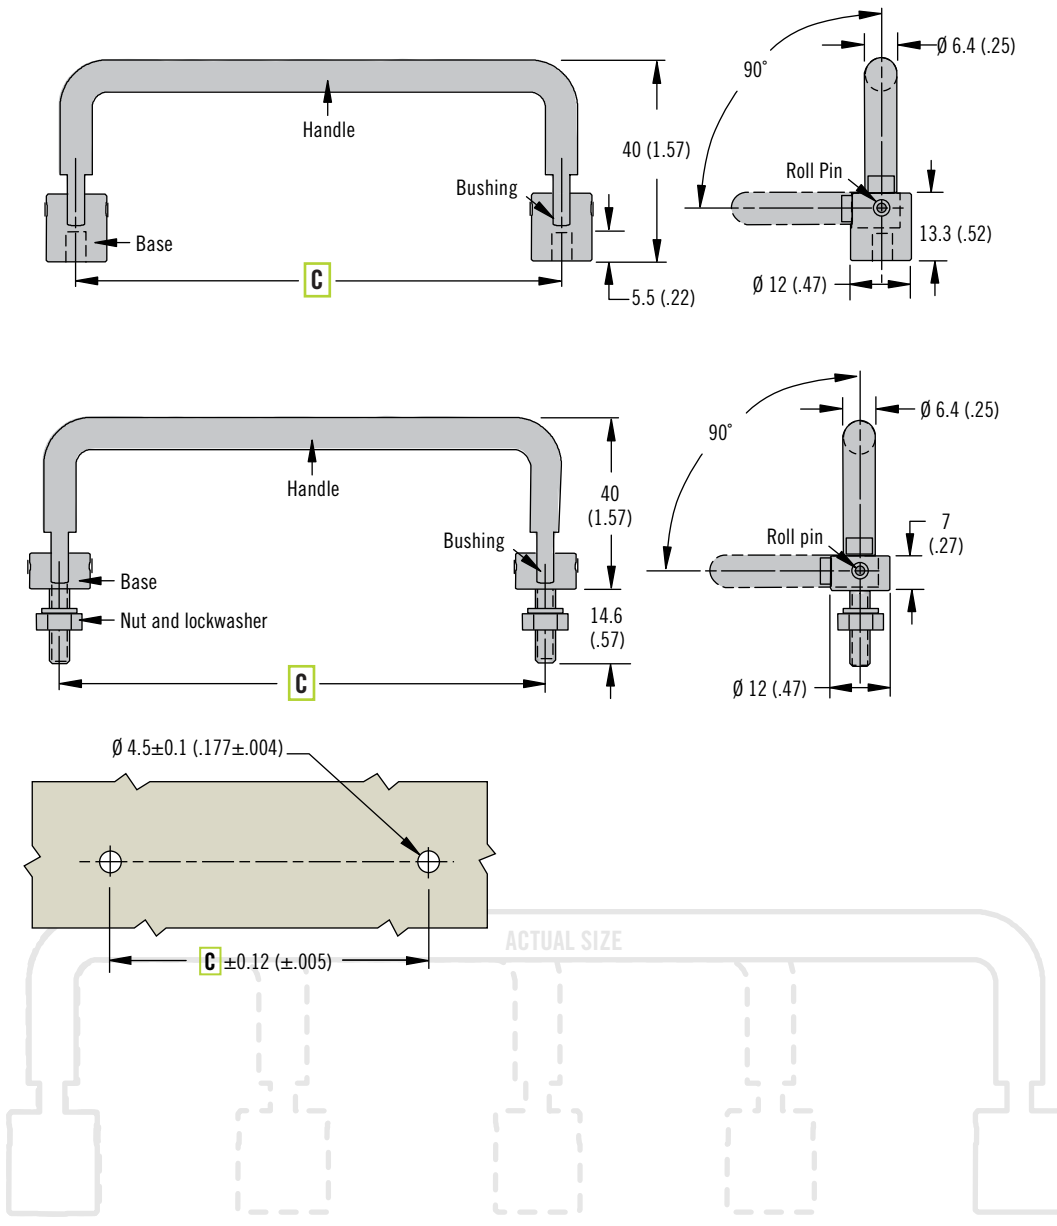

**P9 - C - 40 - T B - 1 F - P**

- C** Centers
  - 040 40 (1.57) Hole centers
  - 064 64 (2.52) Hole centers
  - 096 96 (3.78) Hole centers
  - 128 128 (5.04) Hole centers
- T** Thread
  - 08 Imperial 8-32
  - M4 Metric M4 x 0.7
- B** Base type
  - N Internal thread
  - X External thread
- F** Finish
  - 1 Clear anodized
  - 5 Black anodized
- P** Packing option
  - Omit for individual packaging (1 per bag)
  - 3 Layer packaging contact Southco



Dimensions in millimeters (inch) unless otherwise stated

