



M1 Push-to-Close Latch

Lift-to-open · Flush

- Lift-to-open
- Single hole installation
- Dual sided latching

Material and Finish

Latching slides and mounting bracket:

Glass reinforced nylon, black

Housing and paddle:

Polycarbonate/ABS, black

Performance Details

Max. working load: 500 N (112 lbf)

Flammability rating: UL94-HB

Installation Notes

Max. tightening torque on torx mounting screws:

1.8 N·m (16 in·lbf)

Accessories

Flat key, keyed alike CH751
(2 keys per ring)

Part number: PK-10-01




Overmolded key, keyed alike CH751
(2 keys per ring)

Part number: PK-10-01-05






1. Unlock
2. Press and pull to open
3. Push to close



Part Number

See table

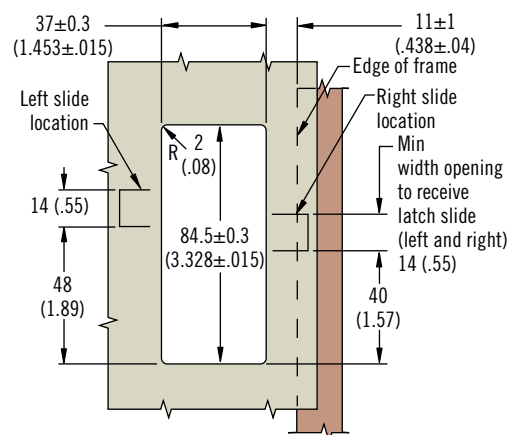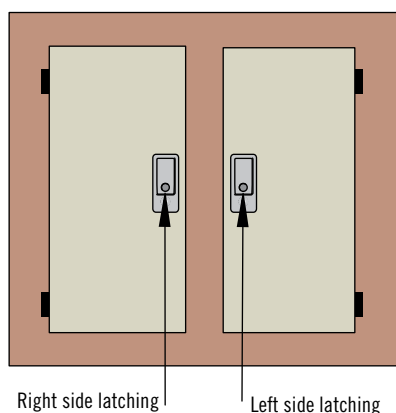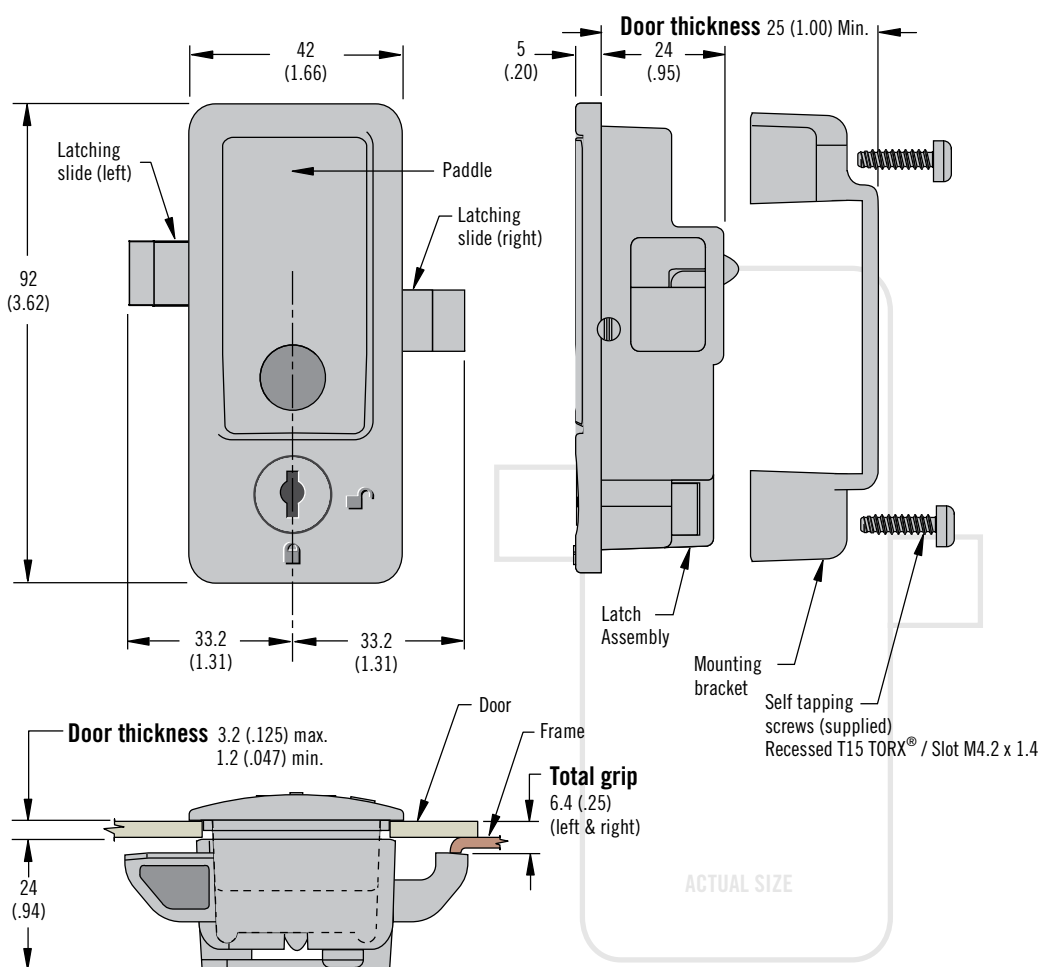

Part Number (2 Flat Keys Supplied)	
Right side latching	M1-2F-1-25
Dual side latching	M1-2F-2-25
Left side latching	M1-2F-3-25

Dimensions in millimeters (inch) unless otherwise stated



www.southco.com/M1C

southco
CONNECT · CREATE · INNOVATE