



ARCONIC

# Huck® Fasteners for Track and Crossing Applications

Reduced Maintenance  
Longer Track Life  
Quick Installation

HUCK®





# Huck® Fasteners

## Reduced Maintenance, Longer Track Life and Fewer Headaches



For track and crossing applications, the Huck C50L®, BobTail® and Huck 360® combine strong, never-come-loose joining power, and easy, safe installation. Huck® fasteners have been proven in track applications ranging from insulated joints and gauge plates, to crossing applications that include RBM frogs and diamonds.

In fact, Huck fasteners have been utilized in over 3,000 frogs and hundreds of other track and crossing components for more than a decade.

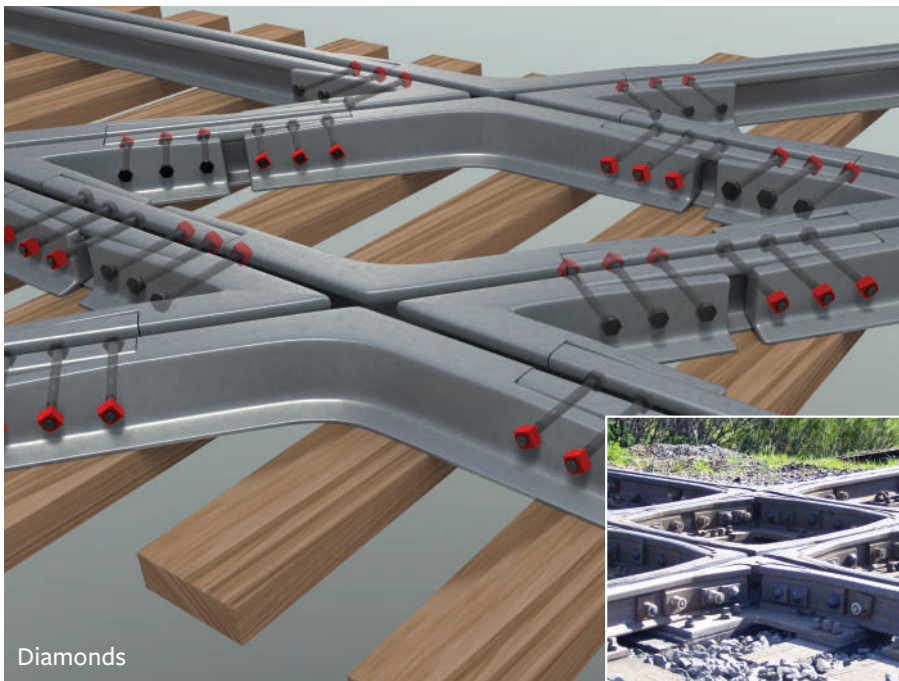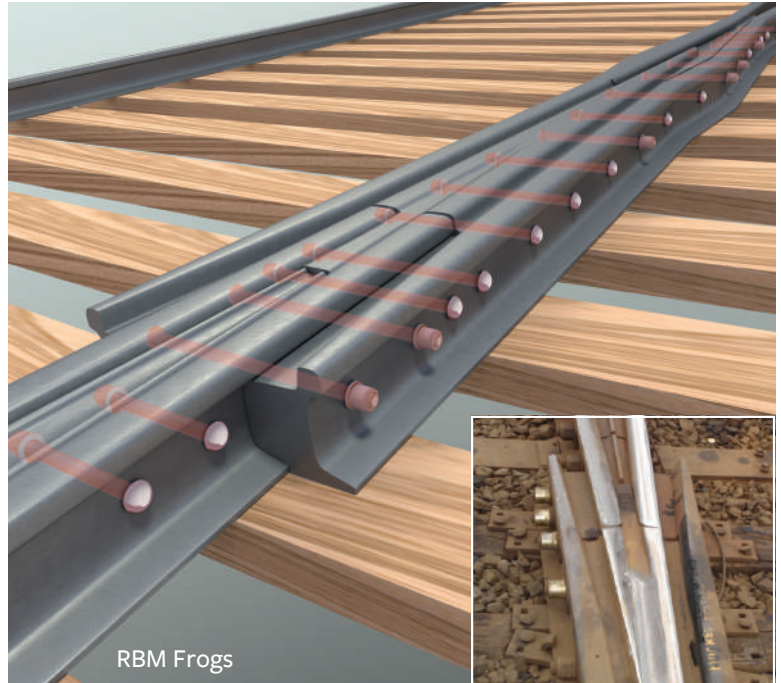

Huck-engineered for the ultimate in uniform clamping power, C5oL, BobTail and Huck 36o HuckBolts® also deliver unmatched vibration resistance. That means reduced flexing, and ultimately, extended track and crossing life. Because Huck fasteners never come loose, maintenance intervals are greatly extended.

Together with unparalleled fatigue life, and safe, quiet, consistent installations, Huck fasteners provide a simple, cost-effective upgrade for your track and crossing applications.

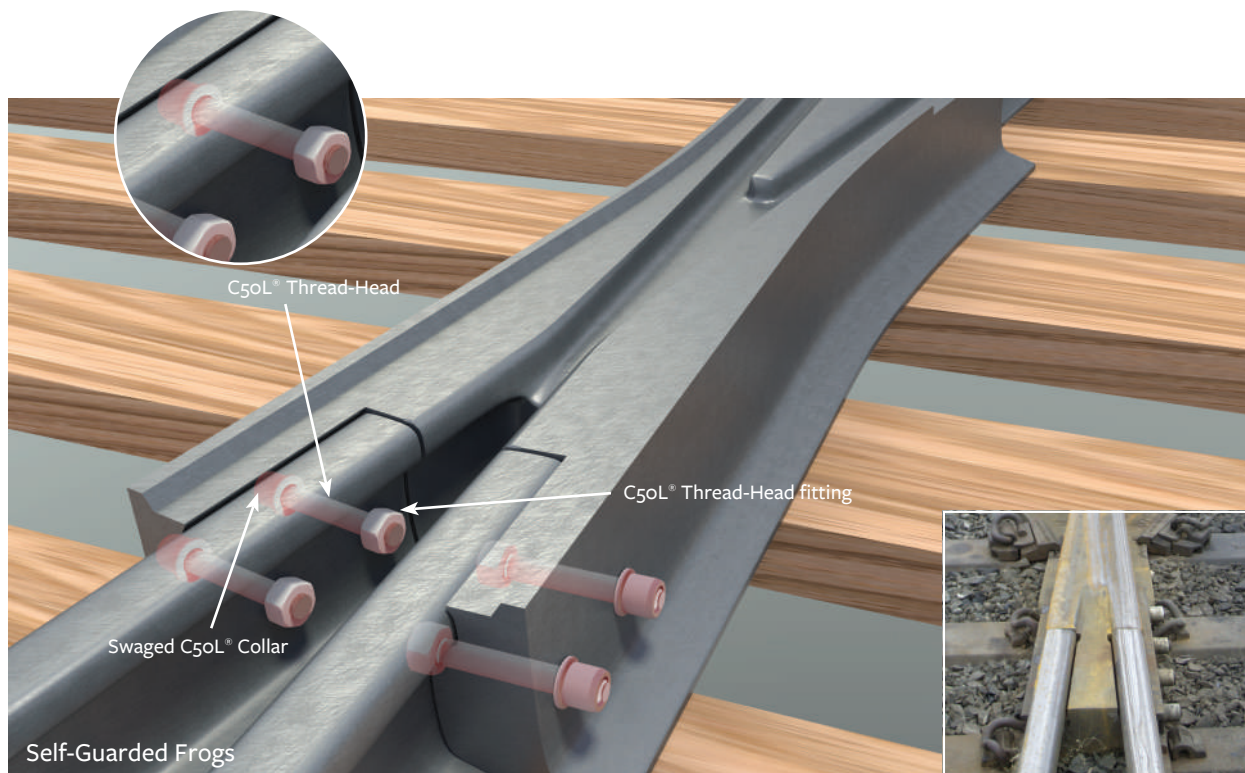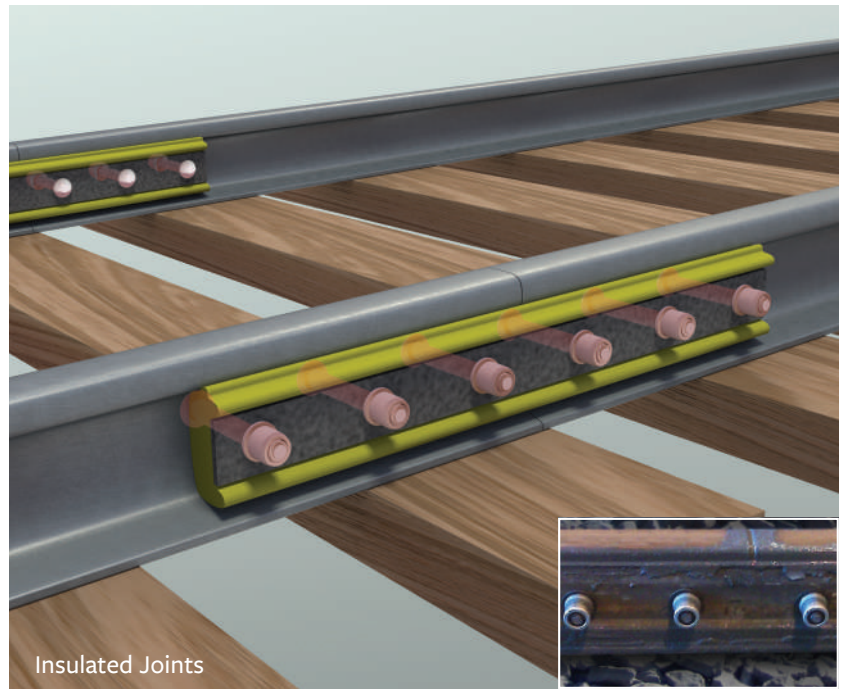

# HuckBolts®

For Heavy-Duty Track Applications

## C5oL®

The C5oL® has defined HuckBolt® for more than 50 years. Offering superior vibration resistance and overall durability for heavy-duty fastening jobs, C5oL is ideal for use within applications where consistent, uniform high clamp force is required. Testing has proven that C5oL fasteners meet or exceed the performance of torqued bolts in both shear and tensile strength, as well as fatigue life.

- Available with conventional head or thread-head design
- Superior vibration resistance and overall durability for heavy-duty applications
- Meets or exceeds torqued bolts in shear and tensile strength, and fatigue life
- Offers consistently high, uniform clamp force
- Exceeds ASTM 325 specifications

**Available Sizes:** 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-3/8"

**Materials:** Steel, Aluminum

**Headstyles:** Head Styles: Round, 90° Flush, Stainless Cap, Truss, Large Truss, Thread Head



## Huck 360®

The Huck 360® is the most advanced nut-and-bolt fastening system available today. A high-strength, vibration resistant, easy-to-install engineered fastener, Huck 360 can be installed and removed using conventional tools, often in under 2 seconds. Huck 360 has been proven to deliver 5 times the fatigue life of a standard thread bolt, and is virtually maintenance-free.

- Available with conventional head or thread-head design
- Highest-in-class vibration resistance
- Virtually maintenance-free
- Can be installed and removed using conventional tools
- Most advanced nut-and-bolt fastening system available

**Available Sizes:** 3/8", 7/16", 1/2", 5/8", 3/4", 7/8", 1", 1-3/8"  
10mm, 12mm, 14mm, 16mm, 20mm, 24mm, 36mm



## Bobtail®

The Huck BobTail® represents the most advanced fastening technology to date.

Engineered to meet the challenges of a wide range of assembly applications, BobTail offers high performance and reliability in a unique, pintail-less design. It delivers up to 5 times the fatigue strength of conventional nuts and bolts, unmatched installation speed, and vibration resistance. Ideal for the demanding track industry, BobTail is the industry's next-generation lockbolt.

- Unmatched installation speed – often under 2 seconds per fastener
- Unique, low-swage technology enables installation with lightweight, ergonomic tooling
- No-break-off pintail means highest corrosion resistance in its class
- Quick visual inspection is all that's needed for a quality-assured joint



**Available Sizes:** 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8", 1"  
12mm, 14mm, 16mm, 20mm

**Materials:** Steel, Aluminum, Stainless Steel

**Headstyles:** Round, Truss, 90° Flush, Flanged, 98T, Thread Head

## Advanced Huck® Tooling

Huck offers a full line of advanced, heavy-duty hydraulic installation tools and nose assemblies that work with each engineered fastener. For instance, models 2630, 507, and 12142 installation tools work ideally with the C50L fastener, model BTT57 is specifically designed to install the Huck BobTail, and the Huck 360 is installed with conventional tools.

Supporting each installation tool is Huck's wide range of hydraulic Powerig® power units. The Powerig 913H is a gas-powered mobile unit perfect for field use, while the 940 model Powerig is an electric-powered portable unit used for moderate production and repair applications.



Powerig®  
Model 940



Powerig®  
Model 913H



Model  
BTT57



Model  
2630

# Huck® Fastening Technology


## Vibration Resistance: How Huck Does It

Huck engineering. It's what makes a HuckBolt a HuckBolt. And, it's what gives each C50L, BobTail, and Huck 360 its strength and vibration-resistant properties – the highest level of vibration resistance you'll find in the industry.

### Eliminating the Gap


In conventional nut and bolt installations, gaps between nut and bolt threads are a source of potential loosening. The HuckBolt design practically eliminates these gaps, by featuring full metal-to-metal contact between the swaged on collar and the pin. This unique swaged connection provides unwavering vibration resistance, even in the most vibration-intensive environments.

**HuckBolt®**

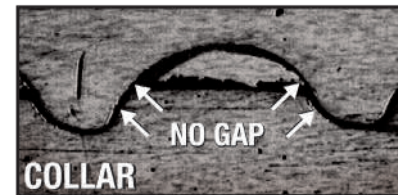

The swaged collar forms over the lock thread, and eliminates the gap.


**Standard Bolt**

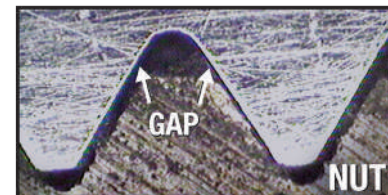


Regular nuts and bolts have gap, which allows for loosening by vibration.

When compared with conventional nuts and bolts, HuckBolts have a much larger cross-sectional area and larger root radius, resulting in a much stronger and more secure joint. In fact, HuckBolts have up to 30% more bolt cross-sectional area, and up to 5x more root radius than regular bolts, depending on the bolts used.

**Bolt Thread Comparison**

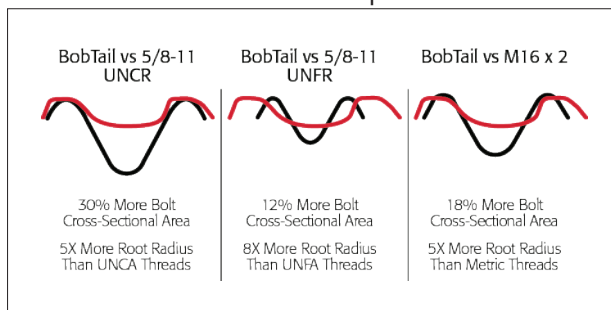

**Transverse Vibration Comparison**

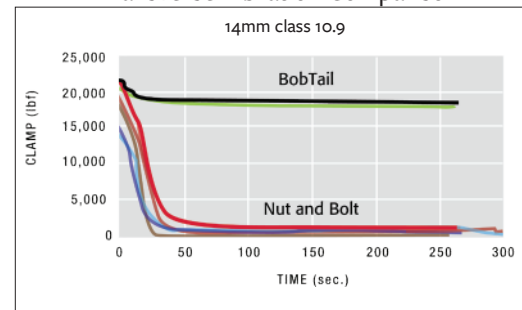

## Huck vs. Conventional Joining

As compared with conventional torqued-on nuts and bolts, and when contrasted with welding, Huck fasteners offer the combination of a reliable, vibration-resistant joint, and a safe, efficient installation process. Huck fasteners are proven to never come loose, even in the most vibration-intensive applications, and maintain strength and structural integrity for the life of the joint.


## Huck Vs. Torque Clamp: The True Measure of Joint Integrity

Torque has long been the standard by which tightness of a joint was measured. However, clamp has been proven to be the true indicator of whether or not a joint exhibits high strength and long life. Only HuckBolts, which use the direct tension/swaging method of installation, deliver that consistent clamp. To prove it, Huck engineers tested conventional nuts and bolts and established that even when torque is consistent, clamp isn't. The result of that testing is found below.

Torque at 226 ft-lb					
GRADE 8 FASTENER	CLAMP LBF TEST 1	CLAMP LBF TEST 2	CLAMP LBF TEST 3	CLAMP LBF TEST 4	% VARIATION
FREE RUNNING NUT	15,000	20,000	21,000	18,000	40%
NYLON LOCK NUT	21,500	18,000	18,000	24,000	33%
STOVERIZED LOCK NUT	26,000	21,000	28,500	23,000	36%

Because HuckBolts are not subjected to torsion during installation, they can safely be taken to higher preload values than conventional bolts. This installation requires direct-tension only, while conventional bolts are under a combination of tension and torsion during installation. Conventional bolts develop torsional forces from friction and geometric factors between the mating threads, resulting in a reduction of yield and tensile strength of 10% to 20%. The torque-tension relationship is shown in the chart to the right.

### Direct vs. Torque Tension Comparison

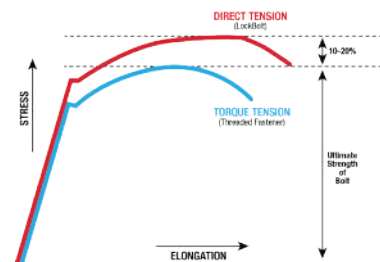

See for yourself.

Watch the video at [afshuck.net/clamp](http://afshuck.net/clamp).

## HuckBolts Change The Equation

While welding has long been utilized to deliver a secure joint, there are several strong reasons to consider a proven alternative - direct-tension, swaged on HuckBolts. Fastening with vibration-resistant HuckBolts instead of welding offers five key benefits over welding: safety, simplicity, speed, cost-savings, and structural integrity. Utilized over more than 30 years in the harsh trucking and rail industry environments, Huck fasteners have proven they perform.





# Arconic Fastening Systems

Arconic Inc. (NYSE: ARNC) creates breakthrough products that shape industries. Working in close partnership with our customers, we solve complex engineering challenges to transform the way we fly, drive, build and power. Through the ingenuity of our people and cutting-edge advanced manufacturing, we deliver these products at a quality and efficiency that ensures customer success and shareholder value.



## North America

### Waco Operations

PO Box 8117  
8001 Imperial Drive  
Waco, TX 76714-8117  
Tel: +1 800-388-4825  
Fax: +1 800-798-4825  
afs.sales.waco@arconic.com

### Tracy Operations

1925 North MacArthur Drive  
Tracy, CA 95376  
Tel: +1 800-826-2884  
Fax: +1 800-573-2645  
afs.sales.idg@arconic.com

### Kingston Operations

1 Corporate Drive  
Kingston, NY 12401  
Tel: +1 800-278-4825  
Fax: +1 845-334-7333  
afs.sales.kingston@arconic.com

### Carmel Operations

14300 Clay Terrace Blvd Suite 250  
Carmel, IN 46032, USA  
Tel: +1 800-826-2884  
Fax: +1 800-573-2645  
afs.sales.idg@arconic.com

## Global

### Kolkata Operations

Unit No. 28, 2nd Floor,  
55/1, Chowringhee Road,  
Kolkata 700071, West Bengal, India  
Tel: +91-33-40699170  
Tel: +91-33-40699180  
Fax +91-33-40699184

### São Paulo Operations

Rodovia Anhanguera, s/n, KM 17,  
Parque São Domingos - Complexo  
Anhanguera - Galpão 1 Seção III  
(Módulo III) Box 11  
CEP 05112-000 São Paulo - SP Brazil  
Tel: +55-11-3583-7061

### Telford Operations

Unit C, Stafford Park 7  
Telford, Shropshire  
England TF3 3BQ  
Tel: +44 (0) 1952-290011  
Fax: +44 (0) 1952-290459  
thisales@arconic.com

### Melbourne Operations

1508 Centre Road  
Clayton, Victoria  
Australia 3168  
Tel: +613-8545-3333  
Fax: +613-8545-3390  
afs.sales@arconic.com

### Suzhou Operations

58 Yinsheng Road,  
SIP Suzhou, Jiangsu  
215126 China  
Tel: +86-512-62863800-8888

### Tokyo Operations (Japan and Korea)

1013 Hibiya U-1 Bldg.  
Uchisaiwai-cho 1-1-7  
Chiyoda-ku, Tokyo  
100-0011 Japan  
Tel: +81-3-3539-6594  
Fax: +81-3-3539-6585



[afshuck.net/us](http://afshuck.net/us)  
[YouTube.com/AFSIndustrial](https://www.youtube.com/AFSIndustrial)

The information contained in this publication is only for general guidance, and is not intended to create any warranty, express, implied, or statutory; all warranties are contained only in AFS's written quotations, acknowledgments, and/or purchase orders. It is recommended that the user secure specific, up-to-date data and information regarding each application and/or use of such products.